

Description

CPM-70 multifunction power analyzer provide high accuracy single phase and three-phase energy measuring and displaying, energy accumulating, power quality analysis, data logging and data communication.

CPM-70 series meters are able to measure bidirectional, four quadrants kWh and kVarh.

It provides maximum/minimum records for power usage and power demand parameters.

Hardware standard built in a RS485 Modbus communication port , 4 Digital inputs, 2 Relay outputs, LCM and 2 MB flash for data-logging.

In addition , also provide TOU , voltage and current THD, harmonics up to the 31st and auto wiring change (Note) via software .

FCC and CE Approved

Note: Auto wiring change will be had condition limit ,please refer to operation manual.

Applications

- Energy management system
- Intelligent power panel
- Community power monitoring
- Power Grid automation
- Factory automation
- Industrial automation
- Intelligent green building

Ordering Information

CPM

Model	A Input Range	V Input Range	Output	AUX.Power																											
<table><tr><th>CODE</th><th>Function</th></tr><tr><td>71</td><td>Standard</td></tr><tr><td>72</td><td>2nd~31st Individual harmonics with Demand function</td></tr><tr><td>73</td><td>2nd~31st Individual harmonics with Demand and TOU function</td></tr></table>	CODE	Function	71	Standard	72	2nd~31st Individual harmonics with Demand function	73	2nd~31st Individual harmonics with Demand and TOU function	<table><tr><th>CODE</th><th>Input Range</th></tr><tr><td>A1</td><td>0~1A</td></tr><tr><td>A5</td><td>0~5A</td></tr><tr><td>V6</td><td>40~400V_{LN} 60~600V_{LL}</td></tr></table>	CODE	Input Range	A1	0~1A	A5	0~5A	V6	40~400V _{LN} 60~600V _{LL}	<table><tr><th>CODE</th><th>Option</th></tr><tr><td>I4 N R2</td><td>4xDI+2xRelay</td></tr><tr><td>I4 O1 R1</td><td>4xDI+1xDO+1xRelay</td></tr></table>	CODE	Option	I4 N R2	4xDI+2xRelay	I4 O1 R1	4xDI+1xDO+1xRelay	<table><tr><th>CODE</th><th>Power Supply</th></tr><tr><td>ADH</td><td>AC 85~264V DC 100~300V</td></tr><tr><td>ADL</td><td>AC/DC 20~56V</td></tr></table>	CODE	Power Supply	ADH	AC 85~264V DC 100~300V	ADL	AC/DC 20~56V
CODE	Function																														
71	Standard																														
72	2nd~31st Individual harmonics with Demand function																														
73	2nd~31st Individual harmonics with Demand and TOU function																														
CODE	Input Range																														
A1	0~1A																														
A5	0~5A																														
V6	40~400V _{LN} 60~600V _{LL}																														
CODE	Option																														
I4 N R2	4xDI+2xRelay																														
I4 O1 R1	4xDI+1xDO+1xRelay																														
CODE	Power Supply																														
ADH	AC 85~264V DC 100~300V																														
ADL	AC/DC 20~56V																														

Meter Selection Guide

Features	71	72	73
Voltage	V ₁₂ V ₂₃ V ₃₁ V _{LL,Avg} / V ₁ V ₂ V ₃ V _{LN,Avg}	●	●
Current	I ₁ I ₂ I ₃ I _{Avg} I _N	●	●
Active Power	Four quadrants P ₁ P ₂ P ₃ Σ P	●	●
Reactive Power	Four quadrants Q ₁ Q ₂ Q ₃ Σ Q	●	●
Apparent Power	S ₁ S ₂ S ₃ Σ S	●	●
Power Factor	PF ₁ PF ₂ PF ₃ PF _{Avg}	●	●
Frequency	Hz	●	●
Active Energy	Wh Imp Wh Exp Wh Total Wh Net	●	●
Reactive Energy	Varh Imp Varh Exp Varh Total Varh Net	●	●
Apparent Energy	VAh	●	●
THD/Voltage	THD _{V12} THD _{V23} THD _{V31} THD _{V,Avg}	●	●
THD/Current	THD _{I1} THD _{I2} THD _{I3} THD _{I,Avg}	●	●
Individual harmonic	2nd~31st Individual harmonics	●	●
Demand	Current Demand, Power Demand	●	●
Max. Demand recording	Max. Demand of Current & Power and time stamp	●	●
Max/Min Values	Maximum / Minimum values and time stamp	●	●
External Control Input	ECI1 ECI2 ECI3 ECI4	●	●
Digital Output	DO1	●	●
Relay Output	RO1 RO2	●	●
Time of Use	4 seasons, 8 tariff settings per day, Per year or up to 5 years setting	●	●
Date and Time	Year, Month, Day, Hour, Minute, Second	●	●
Run hour	Operating hour , Run hour	●	●
CO ₂ Emission	Total CO ₂ weight of energy	●	●
Cost	Total cost of energy	●	●

Accuracy & Resolutions

PARAMETER	ACCURACY	RESOLUTION	MEASUREMENT RANGE
Voltage	0.2%	0.1V	40.0~400.0Vac(V _{LN})
Current	0.2%	0.001A	1%~120% CT rating current
Neutral Current	1.0%	0.001A	1%~120% CT rating current
Active Power	0.5%	1W	-999999999~999999999W
Reactive Power	0.5%	1Var	-999999999~999999999Var
Apparent Power	0.5%	1VA	0~999999999VA
Power Factor	0.5%	0.001	-0.020~+1.000~-0.020
Frequency	0.1%	0.01Hz	45.00~65.00Hz
Active Energy	0.5%	0.1kWh	0~99999999.9kWh
Reactive Energy	0.5%	0.1kVarh	0~99999999.9kVarh
Apparent Energy	0.5%	0.1kVAh	0~99999999.9kVAh
THD	1.0%	0.1%	0~100.0%
Individual harmonic	1.0%	0.1%	0~100.0%
Unbalance	0.5%	0.1%	0~300.0%

Technical Specification

Electrical Characteristics

Measurement: True RMS
Sampling: 128 point/Cycle
Metering system type: 1P2W, 1P3W, 3P3W, (1、2、3CT) 、3P4W (1、3CT) ; Balance/Unbalance
Input range: Voltage:40~400V_{LN} ; 60~600V_{LL}
PT Primary side ratio: 100~1200000V
PT Secondary side ratio:50~500V



- Current:0~5A, (Optional:0~1A)
CT Primary side ratio: 5~9999A
Frequency:45~65Hz
Voltage:2x rated voltage continuous ; 2500V, 1sec
Current:2x rated current continuous ; 20x rated current 1sec
Voltage:<0.2VA ; Current:<0.1 V A
- Metering over range:
- Input load:
- Power Quality**
THD:
Individual harmonic:
- Relay Output(RO)**
Relay contact form: Dual SPST(1a) ; 5A/250Vac ; 5A/30Vdc ;
Relay action mode: Hi / Lo/Hi.Hold / Lo.Hold /DO
Set points: Up to 34 parameters of power and Demand for assign
Digital output mode: Second RO if set to pulse output mode, the maximum frequency is 50Hz
- External Control Input (ECI)**
Input mode: 4 channels ECI input ; mechanical contact open collector input are available
Input function: Can set up for DI /Demand reset / Max. Demand reset / Energy values reset / Max. and Min. values reset / Relay reset
Debouncing time: 0~99 (x8mS) programmable
- Digital Output (DO)**
Output mode: Open collect(O.C.);
Output: 30Vdc, 30mA(max)
Output frequency: 1000Hz(max)
Pulse divider: 1~9999 (1 Pulse= 0.1kWh; if set 100, 1 Pulse= 10.0kWh)
Pulse width: 0~5000(mS), 0 is duty cycle 50%
Energy pulse output: 3200 Pulse/1kWh, Duty cycle 50%
- Demand**
Calculation method: Slide / Fix
- TOU (Time of Use)**
4 Seasons: 1~4 seasons per year
8 Tariff setting: 1~8 each day(For peak, mid peak, off peak per day for billing)
Parameters of TOU : AE-Imp、AE-Exp、AE-Total、RE-Imp、RE-Exp、RE-Total、SE、SE-Total
Yearly setting: Tariff setting for 1 year or set up to 5 years

Data Logging

Setting: Load setting from previous saved file or set according to needs. Time interval from 1~32767 for second, minute, hour or day, depend on value record needs.

Memory storage: 2MB Flash ROM

RS485 communication

Protocol: RS485 Modbus RTU mode

Baud rate: 1200/2400/4800/9600/19200/38400 bps

Data bits: 8 bits

Parity: None / Even / Odd

Stop bit: 1 or 2

Address: 1~247

Distance: 1200M max

Terminate resistor: 120~300Ω/0.25W(typical: 150Ω)

Environmental Characteristics

Operating Temp.: 0~60°C

Humidity rating: 5~95%RH, Non-condensing

Temp. coefficient: ≤100 PPM/°C

Storage Temp.: -10~70°C

IP Enclosure: Front panel: IEC 529 (IP50) ; Housing: Ip20

Power Supply

Range: ADH: AC 85~264V ; DC 100~300V
ADL : AC/DC 20~56V

Power consumption: AC: ≤10VA @ 230V / DC: ≤3W

Mechanical Characteristics

Dimensions: 96mm(W)x96mm(H)x78mm(L)

Panel cutout: 90mm(W)x90mm(H)

Material: ABS, Black (with fire-retardant)

Mounting: Panel mounting

Weight: ≤450g

Wire terminal: PA 66 (UL 94V-0)

Voltage / Current input: AWG: 26~10 / 0.5~4.0mm²

Screw Torque Value: M3 / 8.0kgf.cm (Max)

Others input: AWG: 28~16 / 0.5~1.5mm²

Screw Torque Value: M2 / 2.04kgf.cm (Max)

Safety

Isolation: AC 2KV, 50/60Hz, for 1 min, Between Power / Input / Output / Case

Insulation resistance: ≥100MΩ @ 500V_{dc}

EMC: EN61326-1:2013
EN55011:2009+A1:2010
EN61000-3-2:2014
EN61000-3-3:2013
IEC61000-4-2:2008
IEC61000-4-3:2010
IEC61000-4-4:2012
IEC61000-4-5:2014
IEC61000-4-6:2013
IEC61000-4-8:2009
IEC61000-4-11:2004
EN61010-1:2010

LVD: EN61010-1:2010


FCC: FCC PART15 SUBPART B 2010

Accuracy of energy

Active energy 0.5S Class (IEC62053-22:2003)

Reactive energy 2.0 Class (IEC62053-23:2003)


Front panel

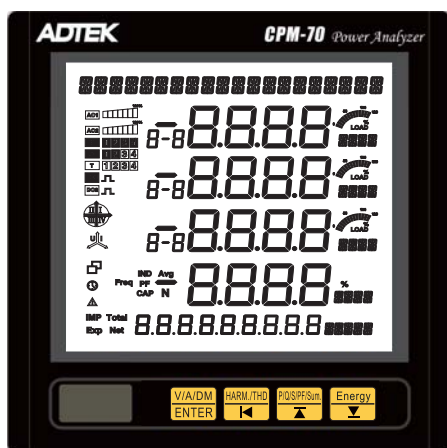


Display: LCD 65(W)x61(H)mm ; White back light blue words visible.
Backlight delay time : 0~15 min ("0" is always on).

Description: Twenty 8 digits in the top of display area: Display mode indication.
Four line of 8 digits in the metering area : Display metering data such as voltage 、 current 、 power 、 power factor 、 frequency 、 unbalance 、 etc.
Four line of 8 digits in the metering area : Display metering data unit.
Three line 8-8 digits: 1, 2, 3 for 3 phase ; 1-2, 2-3, 3-1 for 3 phase line to line.
Nine 8 and five 8 digits: Display energy data and unit.
Also display real time o'clock.


Dimensions

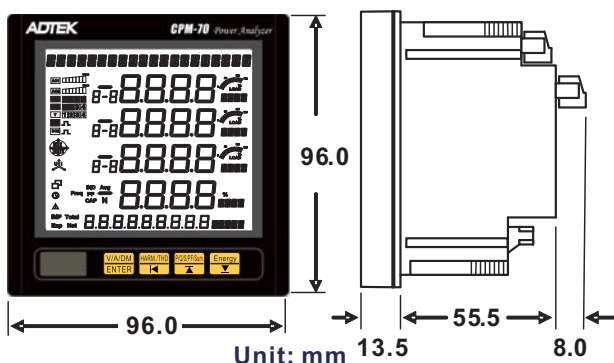


Connection diagram

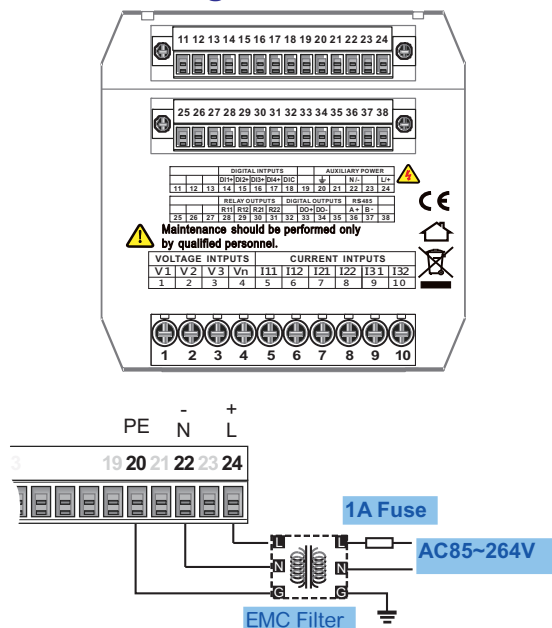

RS485 Communication port

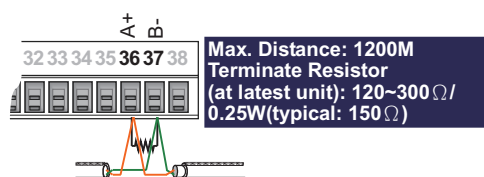


Installation



Voltage and current connection


1P2W

w/o PT/ 1CT

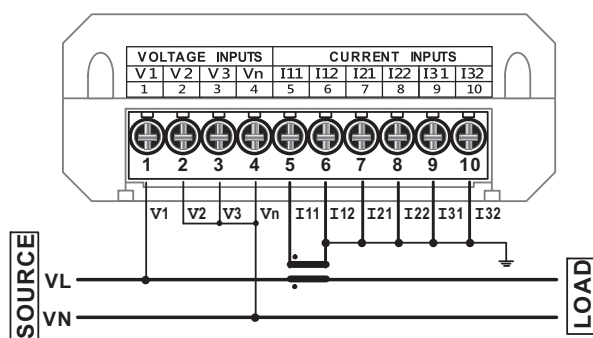


1P3W

w/o PT/ 2CT

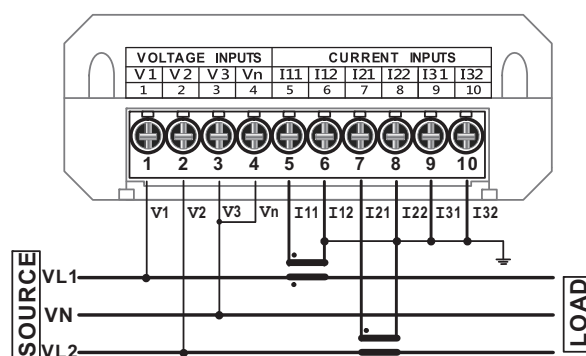


3P3W


2PT/ 3CT

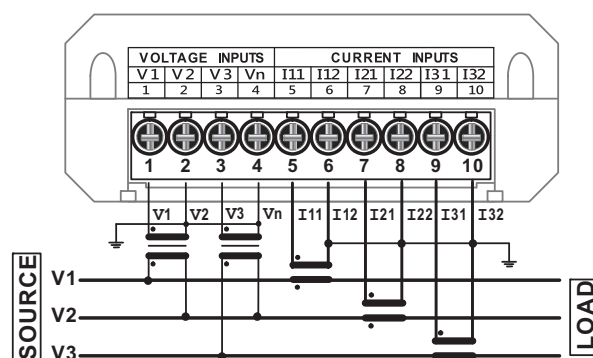


w/o PT/ 3CT

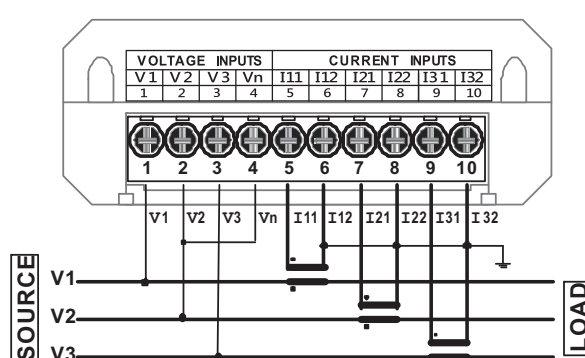


2PT/ 2CT

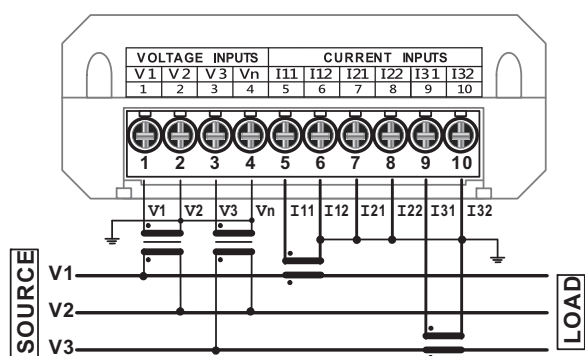


w/o PT/ 2CT

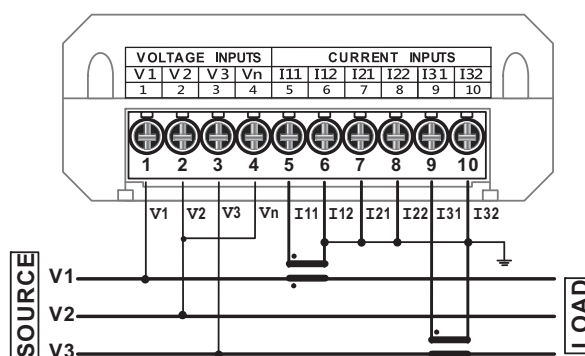

2PT/ 1CT

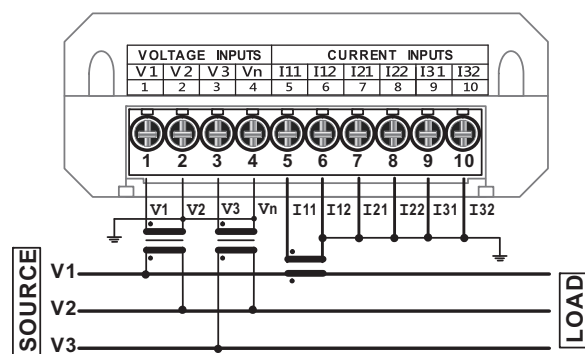


w/o PT/ 1CT

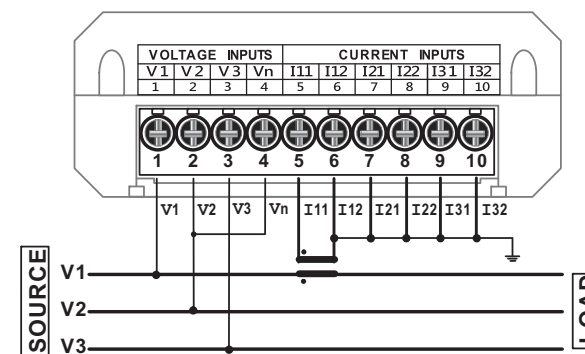


2PT/ 2CT

※This CT connection is available use for Inverter load or normal load situation

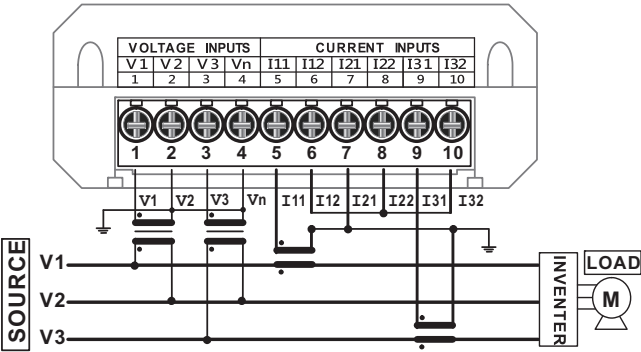


w/o PT/ 2CT

※This CT connection is available use for Inverter load or normal load situation

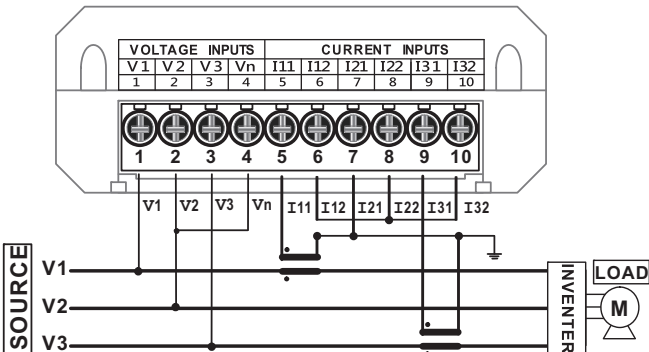


3P4W


3PT/ 3CT

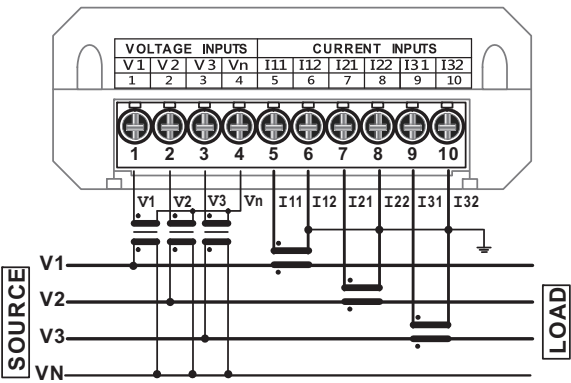


w/o PT/ 3CT

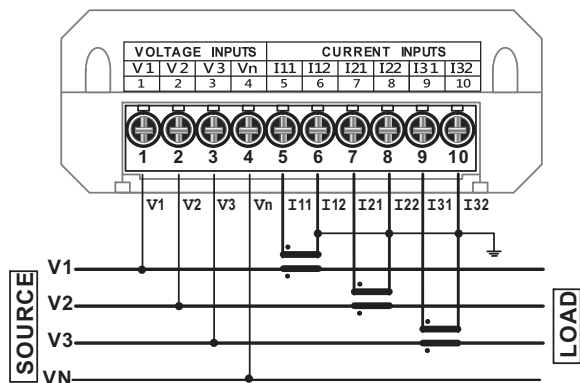

3PT/ 1CT

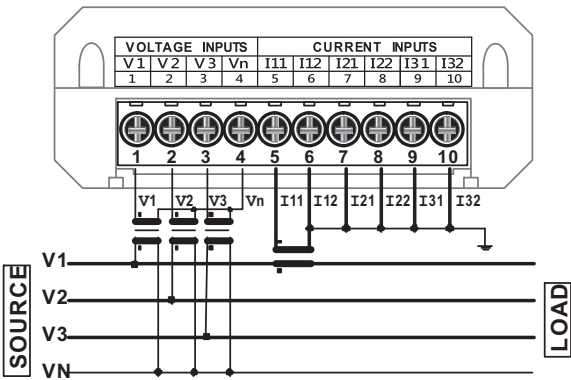


w/o PT/ 1CT

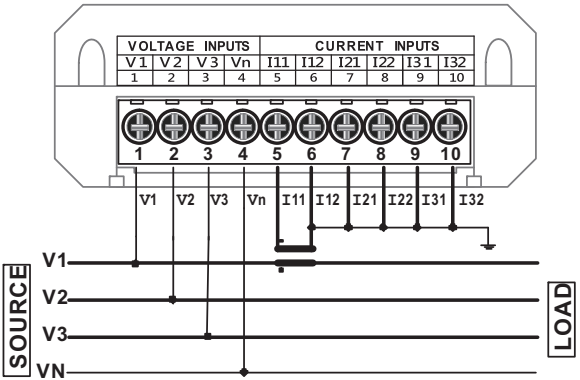

External Control Input (ECI)


Wire:AWG22~16(0.5~1.3mm²)

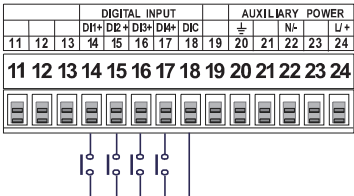

Relay Output(RO)/ Digital Output (DO)

Wire:AWG22~16(0.5~1.3mm²)

2xRelay



1xRelay+1xDO

