

**ROBAUTEC Automation R&D Center – Shenzhen**

Aluminum Housed Resistor

Technical Datasheet

RESPONSIBLE		
	NAME	DATE
AUTHOR	CHUCK RYAN	26.02.2021
VERIFIED BY	YE JANWING	12.02.2021

REVISIONS HISTORY		
REVISION	DATE	REASON OF THE MODIFICATION
7.1.0	10.02.2021	Better Heat Dissipation and Overload Ability, Optional IP55 grade improvement

ROBAUTEC AUTOMATION HK LIMITED

CONTENT

1. PRODUCT DESCRIPTIONS-----	03
2. RRODUCT FEATURES-----	03
3. MATERIAL SPECIFICATIONS-----	04
4. APPLICATIONS-----	05
5. TECHNICAL SPECIFICATIONS-----	05
6. ELECTRICAL SCHEMATIC-----	05
7. SURFACE TEMPERATURE RISE-----	06
8. DERATING CURVE-----	06
9. SELECTION TABLE-----	07
10. PRODUCT STRUCTURE-----	08
11. INSTALLATION GUIDANCE-----	09
12. TECHNICAL STANDARDS-----	09

ROBAUTEC AUTOMATION HK LIMITED

HongKong Headquater: Rm4, 16/F, Ho King Comm Ctr, 2-16 Fayuen St, Mongkok Kowloon, Hong Kong 999077

Shenzhen RD Center: Rm201, Block A, 1 Qianwan First Rd, Qianhai Shenzhen-Hongkong Cooperation Zone, Shenzhen 518052, P.R. China

Guangzhou Service center: 3 Jindu Road, Xintang Town, Zengcheng Dist, Guangzhou City, 511340 Guangdong Province, China

Tel: +86-755-32837462 / +86-15902026856

Fax: +86-755-61605695

Email: robautech@robautech.com

www.robautech.com www.robautech.cn

Products listed in the datasheet are Robautec standard goods, the parameters are for reference only. Please contact sales and marketing department if any questions. We will not inform you if the information of products are changed.



ROBAUTEC TODAY

-DYNAMICS THROUGH RESISTANCE

Creating custom-made solutions for our customers and finding answers to new applications. Flexible production through vertical integration with own sheet metal working. Continuity paired with the confidence that comes with a down-to-earth family-run business have always been the key factors for ROBAUTEC's success, from its beginnings as a small workshop right up to its present status today as one of the advanced power resistor manufacturers. With our sustainable company management, we want to make sure that we continue to fulfil our responsibility to our customers, suppliers and employees.

For us, long-term success is more important than short-term results. It is this that we focus on when we make decisions and investments.

Variety is our programme.

ROBAUTEC's product portfolio covers a broad range of power and resistance values, from a few watt to Megawatts. Because of the many different possible individual specifications, our manufacturing process is order-related, from single parts to large-scale production.

Best quality. Cost-effective

We can guarantee the highest possible quality based on the effective costs because our entire resistor programme is manufactured at our own production plant. Our employees have years of experience, and many of them are specialists.

Aluminum Housed Resistor technical specifications

1. PRODUCT DESCRIPTIONS

Aluminum Housed Resistor are high protection class resistor superior to conventional ceramic-skeleton resistor in terms of weatherproof, oscillation-resistant and safety and is widely applied to electrical circuits that has high adaptability to bad ambient such as power supply, inverter and servo system and has high adaptability to bad ambient operating conditions .

The RXLG series resistors with optional integrated thermal switch from medium power range of ALUMINIUM HOUSED COMPACT BRAKE RESISTORS are electrically insulated and with small dimensions. They can easily be fitted into compact constructions and are especially designed to endure high pulse loads in industrial drive systems.

2. PRODUCT FEATURES




- 1).High IP class of IP33,IP55,IP65 or as required;
- 2).High pulse load and high vibration capability;
- 3).Compact structure,and cool surface;
- 4).No live parts outside;
- 5).Low noise level;
- 6).Low thermal drift;
- 7).Terminals suitable for soldering or bolt connection with high temperature.

3. MATERIAL SPECIFICATIONS

1) Element:	OCr25AL5 or Copper-nickel; Good corrosion resistance, heat resistance, low temperature strength.
2). Core	Ceramic tubar
3). Enclosure	Aluminum Alloy, sprayed oxidized treatment,.
4). Standard terminals	High-temperature resistant Cables / Copper busbars (nickel plating)
5). Part making	Part number, value, dated code, MRC

4. APPLICATIONS

- 1).Dynamic braking;
- 2).Motor Control;
- 3).Load bank testing;
- 4).VFD/Servodrives;
- 5).Crane, hoist & Winch;
- 6).Conveyor;
- 7).Lift & Elevator;
- 8). Industrial robots;
- 9). CNC Machines;
- 10). Packing machine and Injection Molding Machine

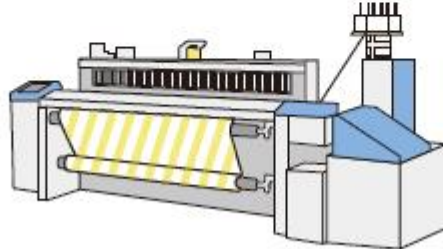


5. TECHNICAL SPECIFICATIONS

1). Power Range	60W ~ 7000W per unit (up to 10kW on request.)
2). Voltage Range	<DC1000V, <AC1200V
3). Resistance Value Range	1ohm – 10kohm
4). Dielectric Strength	AC3.5KV @50HZ 5S
5). IP Class	IP33 / IP55
6). Temperature Coefficient	Less than 400ppm/ degree C
7). Certifitcate	CE Marks
8). Technical Standards	GB8898-2011
9). Vibration	1.5g


6. ELECTRICAL SCHEMATIC



7. SURFACE TEMPERATURE RISE

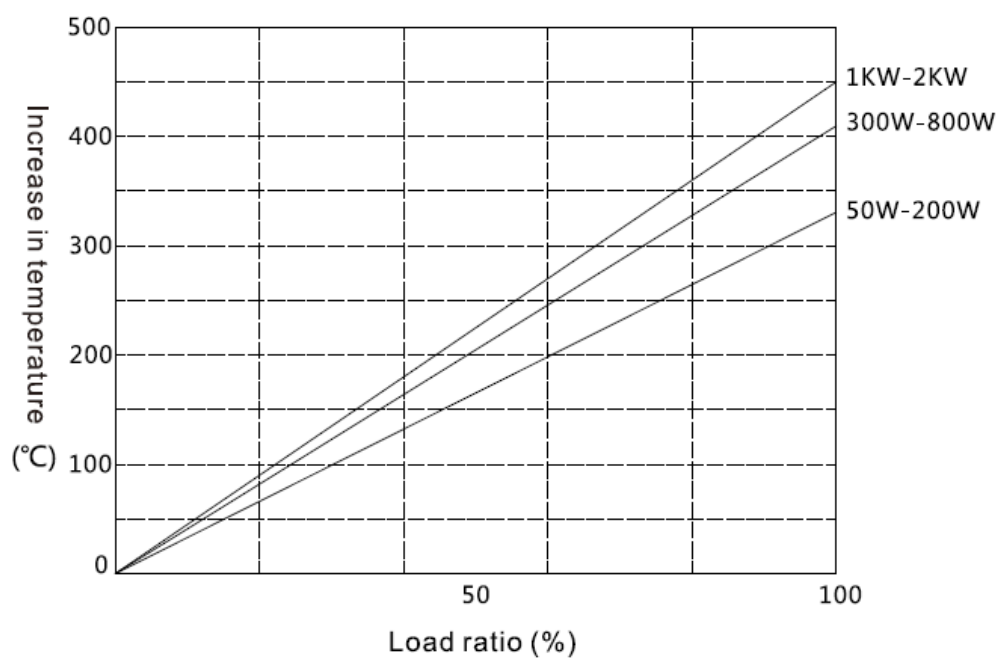

8. DERATING CURVE

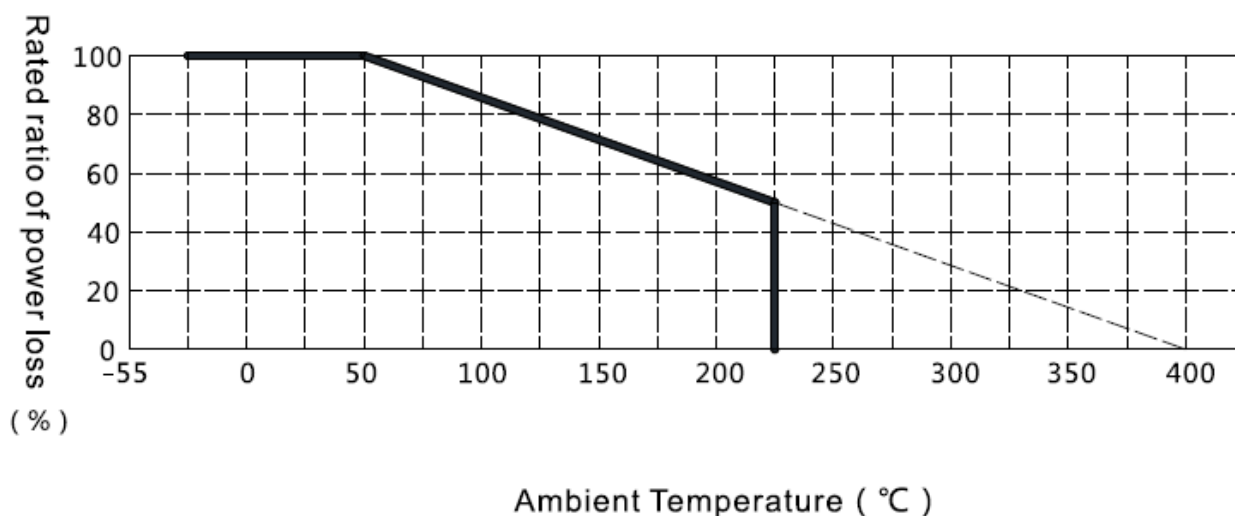

9. SELECTION TABLE


Product Series	Power Rating (watt)	Pic. No.	Dimension (mm)					Weight (kg)	Resistance Range (ohm)	Connection Type	Lead length (mm)
			A	B	C	D	E				
RXLG	60	A	115	100	40	20	5	0.2	1-10k Ω	High temperature resistant Cable	300mm -3000mm x2cables (length custom)
RXLG	80		115	100	40	20	5	0.2	1-10k Ω		
RXLG	100		140	125	40	20	5	0.22	1-10k Ω		
RXLG	120		140	125	40	20	5	0.22	1-10k Ω		
RXLG	150		180	165	40	20	5	0.25	1-10k Ω		
RXLG	200	A/B	170	155	60	30	5	0.4	1-1k Ω		
RXLG	300		220	210	60	30	5	0.5	1-1k Ω		
RXLG	400		245	230	60	30	5	0.7	1-1kΩ		
RXLG	500		265	250	60	30	5	0.8	1-1k Ω		
RXLG	600		285	267	60	30	5	0.9	1-1k Ω		
RXLG	800		335	320	60	30	5	1.0	1-1k Ω		
RXLG	1000		400	390	60	30	5	1.3	1-1k Ω		
RXLG	1200		400	390	60	30	5	1.5	1-1kΩ		


RXLG	1200		400	390	61	59	5	3.0	1-1k Ω		
RXLG	1500	C	400	390	107	50	5	3.3	2-10k Ω	High temperature resistant Cables or Copper busbars	300mm cables or 30mm copperbar
RXLG	2000		450	430	107	50	5	4.0	2-10k Ω		
RXLG	2500		450	430	107	50	5	4.0	2-10k Ω		
RXLG	3000		500	484	107	50	5	5.5	2-10kΩ		
RXLG	3500		550	534	107	50	5	6.0	2-10k Ω		
RXLG	4000		600	534	107	50	5	7.0	2-10k Ω		
RXLG	4500	C/D	650	630	107	50	5	7.5	3-10k Ω	Copper busbar	30mm
RXLG	5000		700	680	107	50	5	8.5	3-10kΩ		
RXLG	6000		750	780	107	50	5	9.0	3-10k Ω		
RXLG	7000	NA	800	880	107	50	5	10.0	3-10k Ω	Copper busbar	30mm

Note:

- 1) ROHS request shall be noted in order. Resistance Tolerance is less than 10% and others on request.
- 2) Power over 8kW for single unit, please call factory for customized projects.
- 3) **RBT-RXLG-(V-H)-XW/YRJ** lable numbering rules, V means Vertical Mounting,H means Horizontal Mounting.
- 4) **IP grade varies from IP21 to IP55, highest IP55 suitable for suitable harsh environment.**


10. PRODUCT STRUCTURE

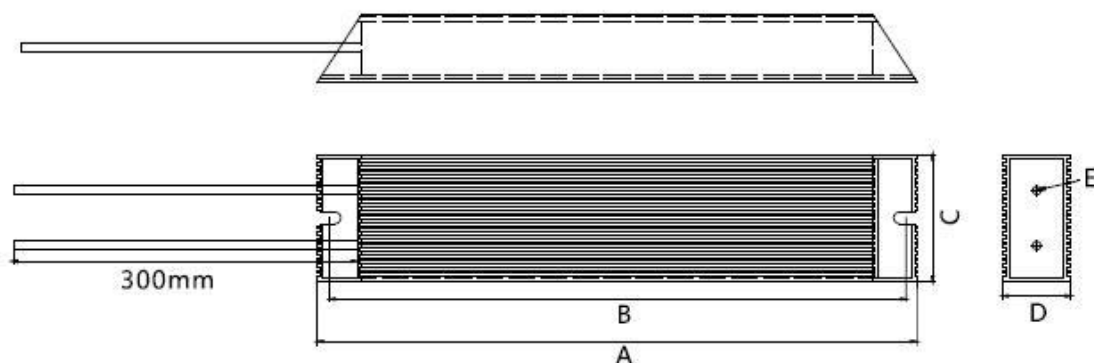

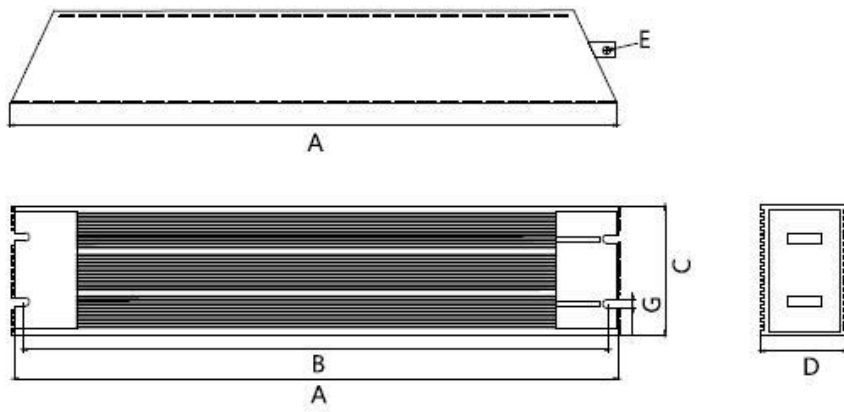


Picture A

Picture B

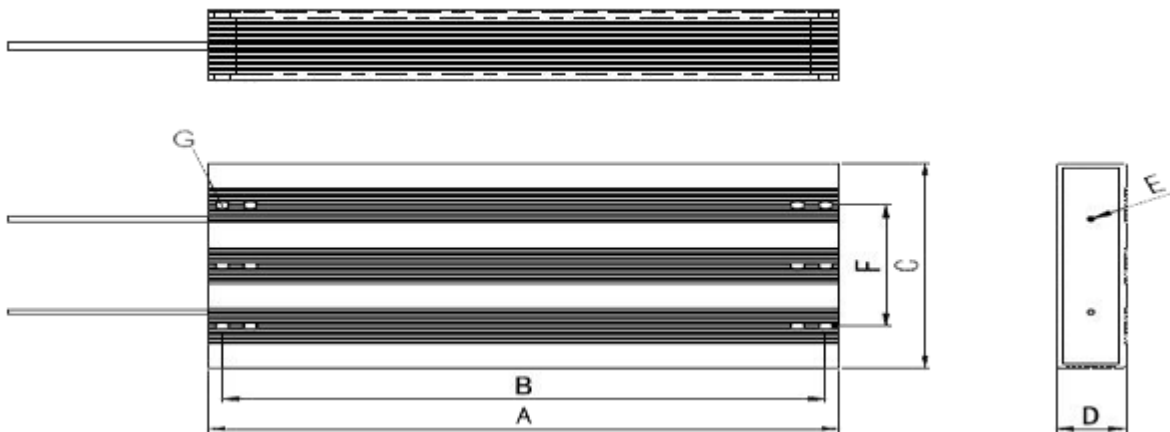

Picture C

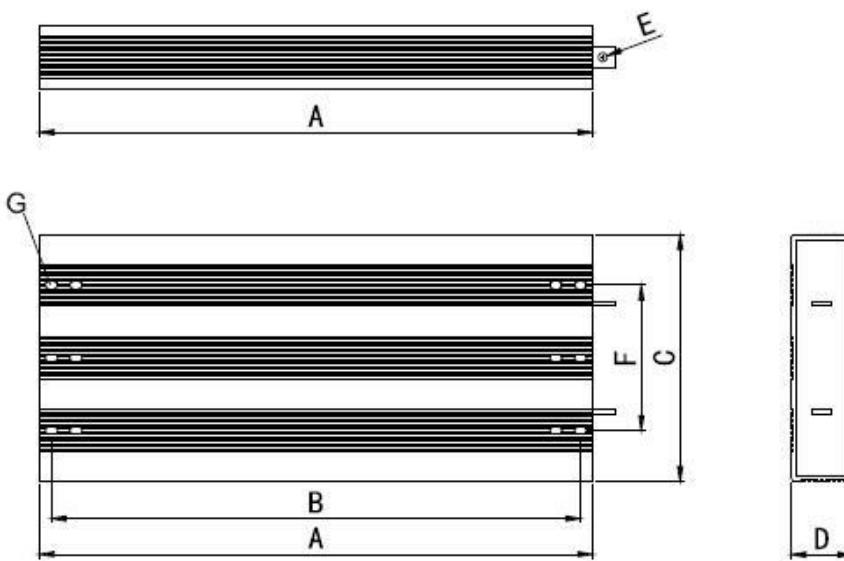

Picture D

11. INSTALLATION GUIDANCE

- 1).Check the outlook of the resistors, see if there is any damage;
- 2).Connect the terminals with the inverter DC bus lines.



12. TECHNICAL STANDARDS

- Load bank anti-corrosion:acid washing,phosphorization,plastic coating , surface must be smooth ,pits and scratch not allowed .
- Inform below content at obvious part:Product name,model,manufacturer,product code,production date etc. All resistors should have only permanent identification code for trace in future.
- GB1234-95 高电阻电热合金.
- GB4208-2008 外壳防护等级
- GB 50150-2006—《电气装置安装工程电气设备交接试验标准》

Recommended spares

Necessary spares to be considered for a period of 3 years including cable terminals, thermal switchgear etc.

Ensure the acceptance of equipment, installation, operation and maintenance,
All documents and information we provide will meet customer system maintenance and further development, expansion needs.We will provide all technical documentation to customer requirements.



Contact us

Reprent. Company	Service Area	Engineer Contact
Hong Kong, China	Asia, Europe, Australia, South America	Chuck Ryan
Series Name	Reference Model Number	Updated Date
Aluminum housed resistor	RBT-RXLG-(V-H)-XW/YR	March 1st, 2021
Person in Charge	Telephone	Fax
Ye Ming/Yeo Gandalf	+86-15902026856	+86-755-61605695
E-Mail	Company Address	Revision
robautech@robautech.com ind.account@robautech.com	HK Headquater: Rm4, 16/F, Ho King Comm Ctr, 2-16 Fayuen St, Mongkok Kowloon, Hong Kong 999077	RBT-RST-7.1.0-2021